VT-MSH

Vibratec®
akustikprodukter

Description

The VT-MSH Multi Spring Hanger is designed for both top or back mounting. It could be used together with Vibratec click-on hangers and profiles for ceiling suspension or as it is for hanging equipment such as speakers, pipes or ventilation.

For beam structures, back mounting of the hangers could reduce the total height of the system.

When a longer distance between ceiling and hanger is needed threaded rods could be used instead of bolts.

Elastically suspended ceilings must also be de-coupled from surrounding walls by using for instance self adhesive elastic strip VC1001.

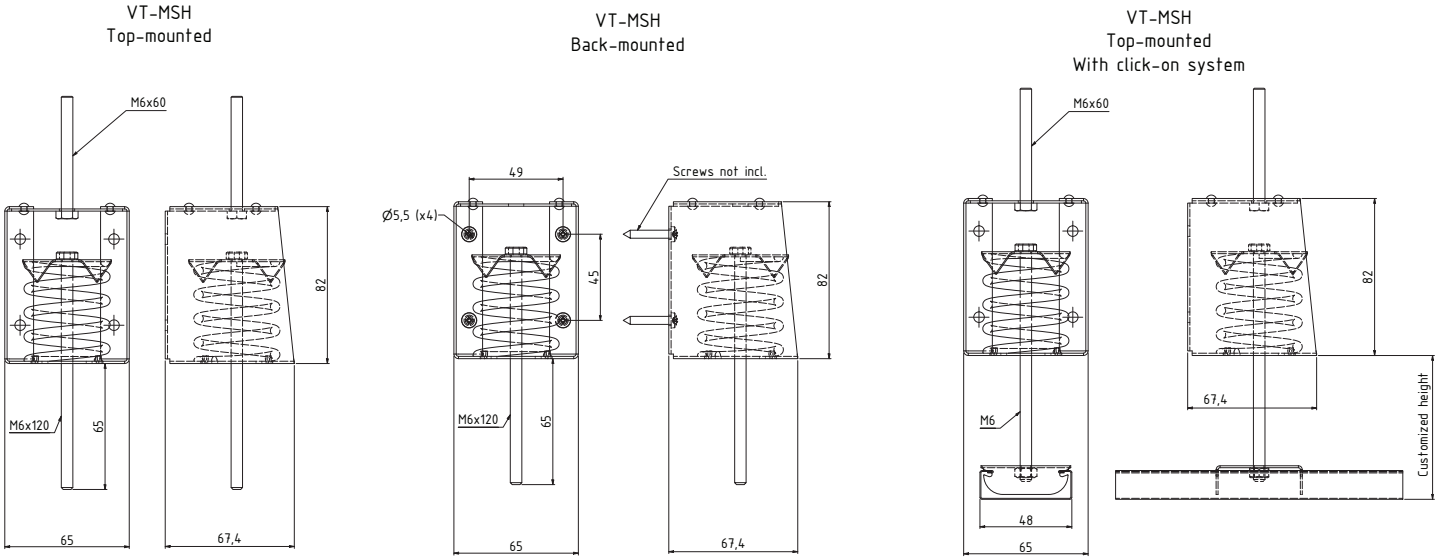

Type	Load range (kg)	Spring rate (N/mm)	fn
VT-MSH-S-1	5 - 7	6	4 - 5 Hz
VT-MSH-S-2	6 - 9	7,6	
VT-MSH-S-3	9 - 13	10,7	
VT-MSH-S-4	13 - 20	17,5	
VT-MSH-S-5	20 - 30	27	
VT-MSH-S-6	30 - 50	39,7	

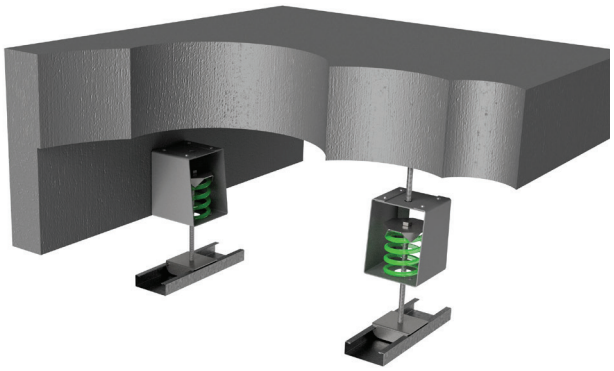

Sweden
Tel: +46 176 20 78 80
e-mail: info@vibratec.se

Norway
Tel: +47 33 07 07 50
e-mail: info@vibratec.no

Denmark
Tel: +45 49 13 22 44
e-mail: info@vibratec.dk

Estonia
Tel: +372 56 66 29 93
e-mail: info@vibratec.ee

We are continuously developing and improving our products and therefore design and specifications in our datasheets may be changed without prior notice