

VT-4523

Single Acting Spring Hanger



Vibratec[®]
akustikprodukter

VT-4523

Single Acting Spring Hanger

Description

Single working all metal telescopic mount with spring made of high tensile steel. Scroll in aluminum and housing in zinc plated steel.


Characteristics

Mounts with low natural frequency, 5-6 Hz, depending on preload.

- Accepts both static and dynamic tension forces.
- Maximum excitation: ± 1 mm.
- Mechanical strength: 2 g.
- Amplification factor: < 5 .
- Temperature range: -90°C to $+300^{\circ}\text{C}$

Applications

- Isolation of exhaust-, air- water- and steam-pipes.
- Isolation of fans, ventilation and cooling aggregates.
- Stabilization of frames and equipment on vessels, ships and vehicles.

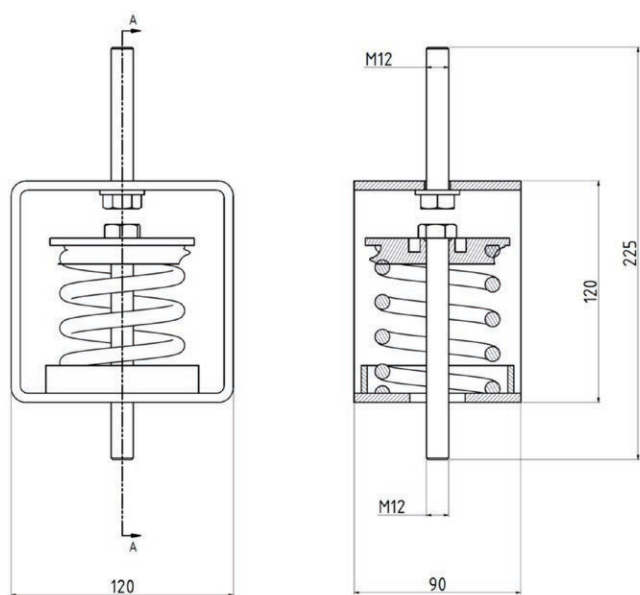

Type	Load [daN=kg]
VT-4523-01	30 - 50
VT-4523-02	50 - 80
VT-4523-03	80 - 125
VT-4523-04	125 - 195
VT-4523-05	195 - 300

Sweden
Tel: +46 176 20 78 80
e-mail: info@vibratec.se

Norway
Tel: +47 33 07 07 50
e-mail: info@vibratec.no

Denmark
Tel: +45 49 13 22 44
e-mail: info@vibratec.dk

Estonia
Tel: +372 56 66 29 93
e-mail: info@vibratec.ee