

VT-MSH

Multi Spring Hanger



Vibratec[®]
akustikprodukter




Description

The VT-MSH Multi Spring Hanger is designed for both top or back mounting. It could be used together with Vibratec click-on hangers and profiles for ceiling suspension, or as it is for hanging equipment such as speakers, pipes or ventilation.

For beam structures, back mounting of the hangers could reduce the total height of the system.

When a longer distance between ceiling and hanger is needed threaded rods could be used instead of bolts.

Elastically suspended ceilings must also be de-coupled from surrounding walls by using for instance self adhesive elastic strip VT-STRIP.

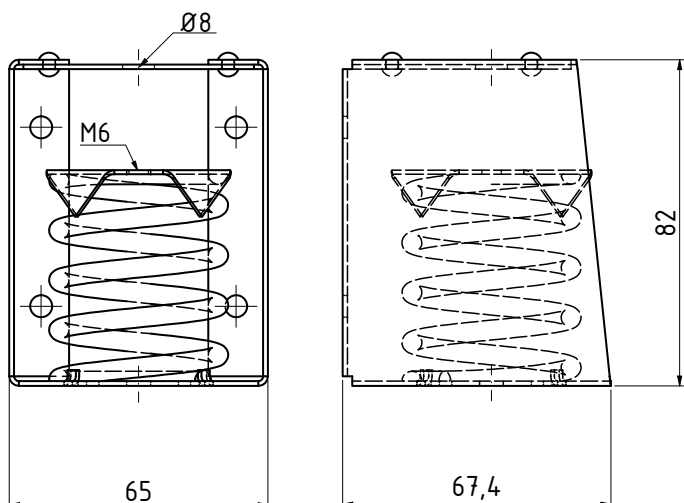

Type	Load (kg)	Spring rate (N/mm)	F_n (Hz)
VT-MSH-S-1	5 - 7	6	4 - 5
VT-MSH-S-2	6 - 9	7.6	
VT-MSH-S-3	9 - 13	10.7	
VT-MSH-S-4	13 - 20	17.5	
VT-MSH-S-5	20 - 30	27	
VT-MSH-S-6	30 - 50	39.7	



SWEDEN

+46 176 20 78 80
INFO@VIBRATEC.SE

NORWAY

+47 33 07 07 50
INFO@VIBRATEC.NO

ESTONIA

+372 56 66 29 93
INFO@VIBRATEC.EE

DENMARK

+45 49 13 22 44
INFO@VIBRATEC.DK

FINLAND

+358 40 258 9117
PALVELU@3DI.FI

INDIA

+91 775 599 63 08
RC@VIBRATEC.IN

FRANCE

+46 176 20 78 80
INFO@VIBRATEC.EU